


# ITS323 – Quiz 5

Name: \_\_\_\_\_ ID: \_\_\_\_\_ Marks: \_\_\_\_\_ (10)


## Question 1 [4 marks]

Consider the network below. Draw and complete the routing table for node B (you must include *cost* in the routing table as well as the other required information).

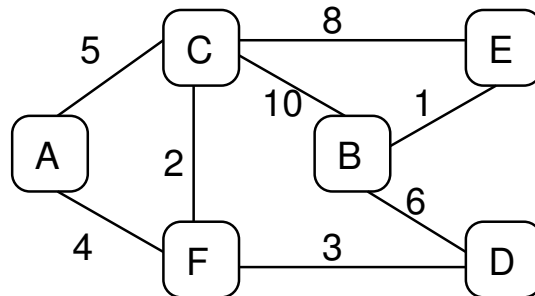

**Question 2** [4 marks]

Assume link state routing is used in the network from Question 1. Each node informs all other nodes of the status of its links by sending a Link State Packet (LSP). The LSP contains a header and data. Complete the LSP that node C sends. The hop limit should be chosen as the smallest value such that all nodes will be reached.

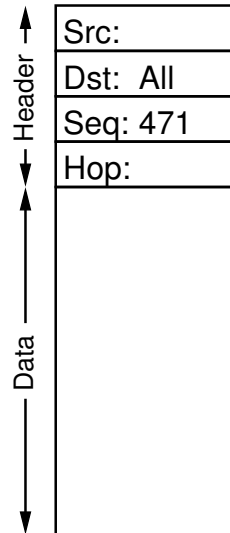**Question 3** [2 marks]

- (a) How many cables (links) are necessary in a ring topology LAN that has 20 computers?
- (b) What is a disadvantage of the topology in part (a) when compared to a star topology?